


Part No:

# ADP-W-27500-11000-34-2F-E



## WR34-2.92mmF End Launch Adapter


ADP-W-27500-11000-34-2F-E is a WR34 to 2.92mm-F adapter which operates across the entire WR34 frequency band of 22-33 GHz with return loss of 20dB minimum.

Parameters	
Pass-Band Frequency	22-33 GHz
Insertion Loss	<0.4dB
Return Loss	20 dB minimum
Operating Temperature	-25°C to +65°C
Material	Aluminum, Silver Plated
Weight	15 grams

### Key Features

- 20dB return loss across entire WR34 frequency band
- Low Pass-band Insertion loss

Typical Measured Data

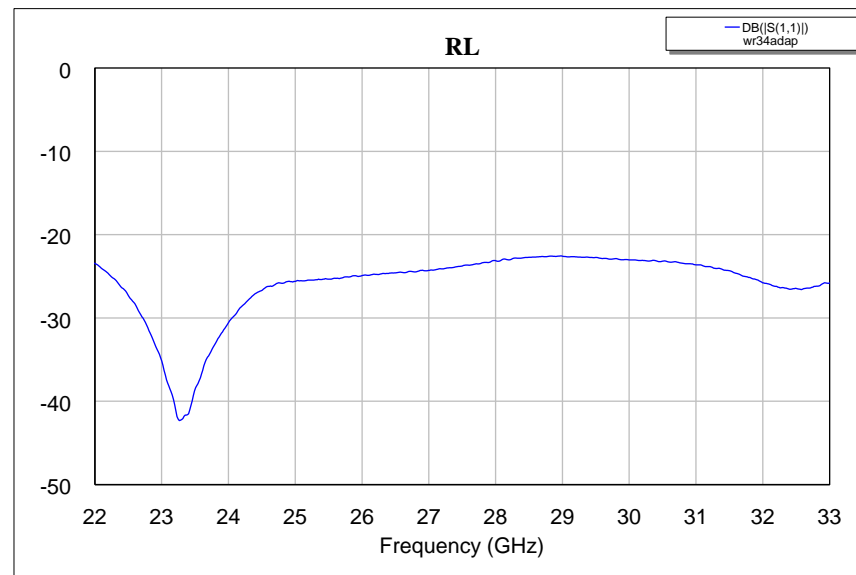

# ADP-W-27500-11000-34-2F-E

