


**Simulated Data in HFSS**

XY Plot 1

N8b ▲

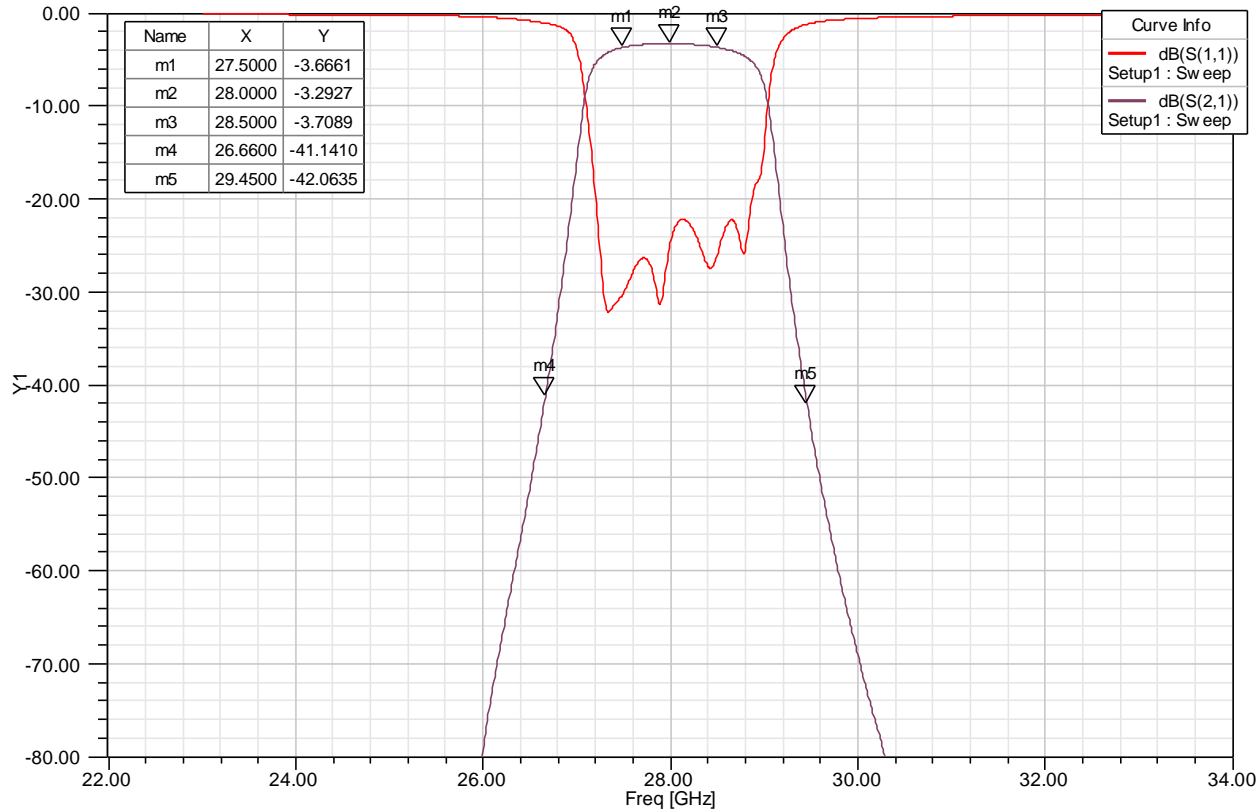

0.500 in

0.120 in



Parameters	
Pass-Band Frequency	27.5-28.5 GHz
Insertion Loss	3.3dB @ Fc
Insertion Loss Flatness	<0.5dB
Return Loss	>20dB
40dB Rejection Frequency	26.66 GHz & 29.45 GHz
Material	Alumina er=9.9
Board Thickness	0.010 in
Metallization	TiW/Au 0.22 mil thick
Cavity Above Substrate	0.100 in

- Actual hardware data may be different from the simulated data depending on the material quality, accuracy of the dielectric constant & thickness, metallization type, etching tolerance, housing material, method of substrate attachment to the housing, and any mismatch between the filter and the interface port of the measuring device.