


Simulated Data in HFSS

0.400in

0.135 in

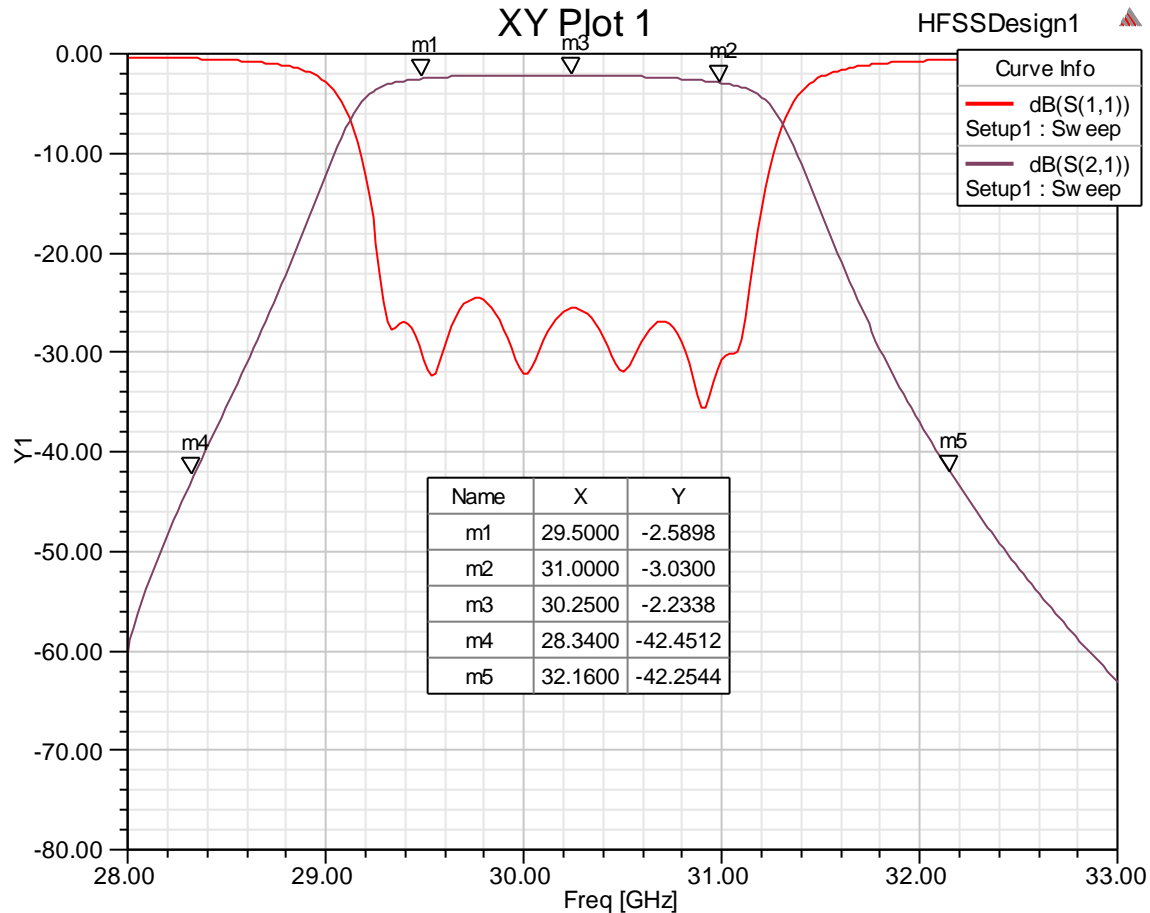

Parameters	
Pass-Band Frequency	29.5-31 GHz
Insertion Loss	2.3dB @ Fc
Insertion Loss Flatness	<0.8dB
Return Loss	>20dB
40dB Rejection Frequency	28.34 GHz & 32.16 GHz
Material	Alumina er=9.9
Board Thickness	0.010 in
Metallization	TiW/Au 0.22 mil thick
Cavity Above Substrate	0.100 in

- Actual hardware data may be different from the simulated data depending on the material quality, accuracy of the dielectric constant & thickness, metallization type, etching tolerance, housing material, method of substrate attachment to the housing, and any mismatch between the filter and the interface port of the measuring device.