


Part No:

# BSF-W-00193

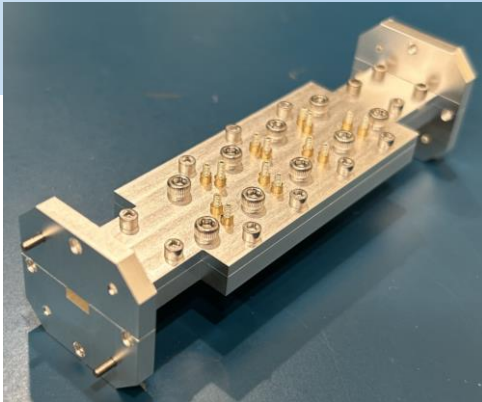

## V-Band BandStop Filter

Parameters	
Pass-Band Frequency	47.0-50.0 GHz & 50.5-52.0 GHz
Insertion Loss	<0.3dB
Return Loss	>15dB
Rejection 50.265-50.34 GHz	10dB

BSF-W-00193 is a WR19 band-stop filter that rejects a very narrow bandwidth of 50.265 to 50.34 GHz. Both sides of the passband has low insertion loss and good return loss.

### Key Features

- Very narrow bandwidth rejection
- Low Insertion loss across pass-band
- 15dB return loss

Typical Measured Data

