


**Simulated Data in HFSS**

2.000 in

0.150 in

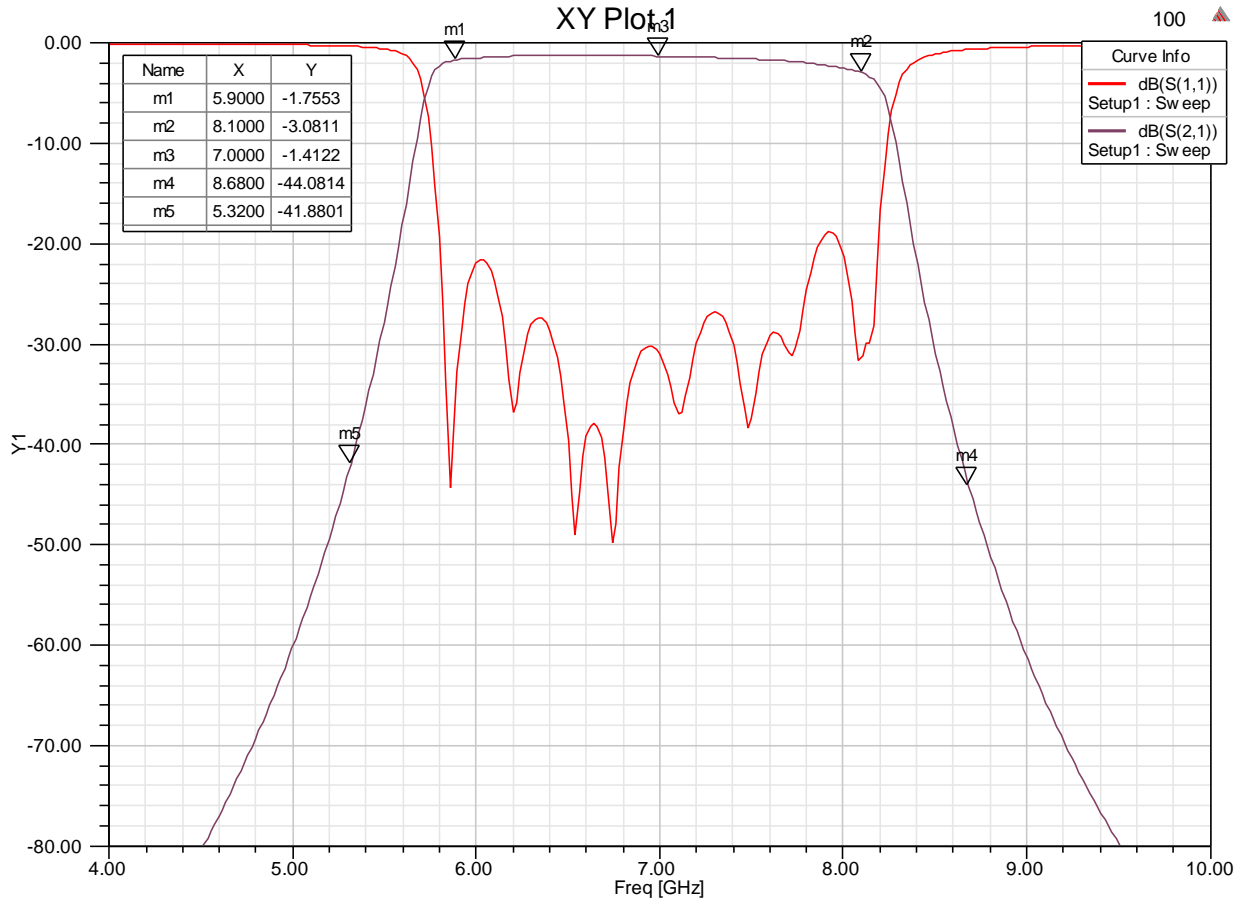

Parameters	
Pass-Band Frequency	5.9-8.1 GHz
Insertion Loss	1.5dB @ Fc
Insertion Loss Flatness	<1.6dB
Return Loss	>20dB
40dB Rejection Frequency	5.3 GHz & 8.7 GHz
Material	Alumina er=9.9
Board Thickness	0.020 in
Metallization	TiW/Au 0.22 mil thick
Cavity Above Substrate	0.120 in

- Actual hardware data may be different from the simulated data depending on the material quality, accuracy of the dielectric constant & thickness, metallization type, etching tolerance, housing material, method of substrate attachment to the housing, and any mismatch between the filter and the interface port of the measuring device.