
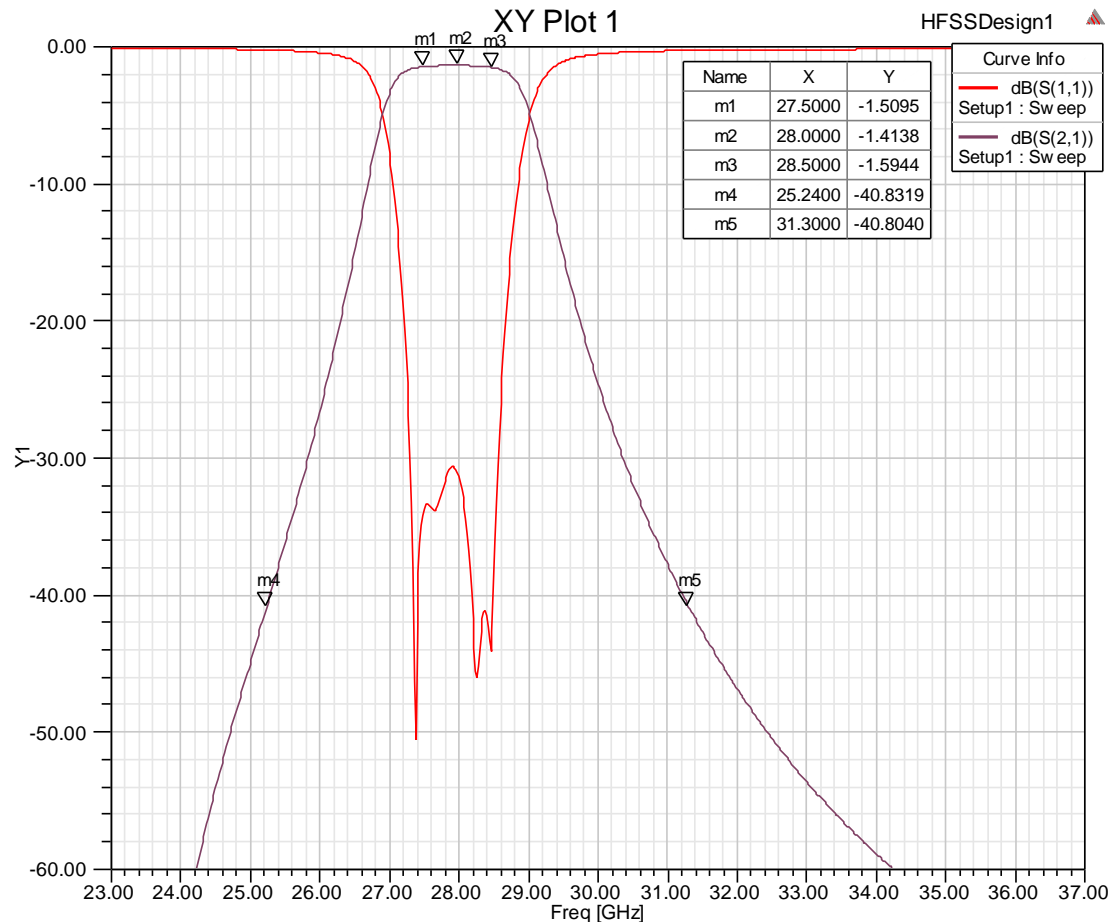


**Simulated Data in HFSS**

0.300 in

0.130 in



Parameters	
Pass-Band Frequency	27.5-28.5 GHz
Insertion Loss	1.5dB @ Fc
Insertion Loss Flatness	<0.2dB
Return Loss	>20dB
40dB Rejection Frequency	25.2 GHz & 31.35 GHz
Material	Alumina er=9.9
Board Thickness	0.010 in
Metallization	TiW/Au 0.22 mil thick
Cavity Above Substrate	0.100 in

- Actual hardware data may be different from the simulated data depending on the material quality, accuracy of the dielectric constant & thickness, metallization type, etching tolerance, housing material, method of substrate attachment to the housing, and any mismatch between the filter and the interface port of the measuring device.